
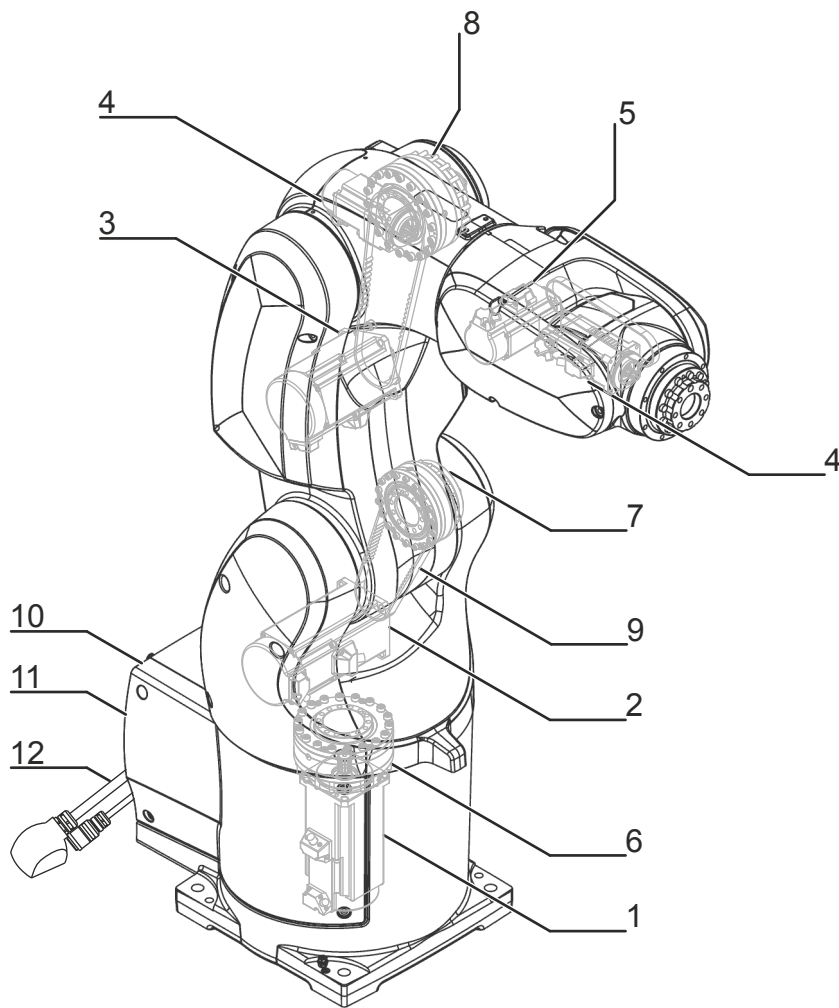


KUKA | Xpert

Identification number: AR12240

货号	0000-270-971
材料状态	10 - 批准预生产
制造商	KUKA Roboter
产品图片	


Spare parts



Spare parts graphic KR 3 R540 , schematic representation

Pos.	Article number	Designation	Component	Work instruction
1	0000-278-980	SPP motor A1	Motor A1	Exchanging motor A1
2	0000-278-982	SPP motor A2	Motor A2	Exchanging motor A2
3	0000-278-984	SPP motor A3	Motor A3	Exchanging motor A3
4	0000-278-988	SPP motor A4/A6	Motor A4 Motor A6	Exchanging motor A4 Exchanging motor A6
5	0000-278-987	SPP motor A5	Motor A5	Exchanging motor A5
6	0000-278-990	SPP gear unit A1	Gear A1	Exchanging gear unit A1

Pos.	Article number	Designation	Component	Work instruction
7	0000-278-992	SPP gear unit A2	Gear A2	Exchanging gear unit A2
8	0000-278-994	SPP gear unit A3	Gear A3	Exchanging gear unit A3
9	0000-278-989	SPP set of toothed belts (A2, A3, A5)	Toothed belt	
10	0000-279-262	SPP μ RDC	RDC	
11	0000-279-263	SPP EDS	EDS	
12	0000-280-354	SPP connecting cables		

Export to Excel 

Maintenance information

Toothed belt tension

Toothed belt tension motor	
A2	215 ± 5 Hz
A3	180 ± 5 Hz
A4	-
A5	215 ± 5 Hz
A6	-

技术数据

基本数据

	KR 3 R540
轴数	6
可控制的轴数	6
工作空间体积	0.61 m ³
位姿重复精度 (ISO 9283)	± 0.02 mm
重量	约 26.5 kg
额定负荷	2 kg
最大运动范围	541 mm
防护等级 (IEC 60529)	IP40
机器人腕部防护等级 (IEC 60529)	IP40
噪声等级	< 68 dB (A)
安装位置	地面; 屋顶; 墙壁
占地面积	179 mm x 179 mm
运动系统安装面布孔图	S150
允许倾角	-
标准色	底座: 灰铝色 (RAL 9007); 活动部件: 交通白 (RAL 9016)
控制系统	KR C4 compact
变压器名称	KR C4: KR3R540 C4SR

环境条件

湿度等级 (EN 60204)	-
环境条件分类 (EN 60721-3-3)	3K3
环境温度	
运行时	5 °C 至 45 °C (278 K 至 318 K)
仓储和运输时	-40 °C 至 60 °C (233 K 至 333 K)

轴参数

运动范围	
A1	$\pm 170^\circ$
A2	$-170^\circ / 50^\circ$
A3	$-110^\circ / 155^\circ$
A4	$\pm 175^\circ$
A5	$\pm 120^\circ$
A6	$\pm 350^\circ$
额定负载时的速度	
A1	530 °/s
A2	529 °/s
A3	538 °/s
A4	600 °/s
A5	600 °/s
A6	800 °/s

负载能力

额定负荷	2 kg
最大负载能力	3 kg
法兰 Ix 额定质量转动惯量	0.045 kgm ²
底座的额定附加负载	0 kg
底座的最大附加负载	0 kg
转盘的额定附加负载	0 kg
旋转机构的最大附加负载	0 kg
大臂的额定附加负载	0 kg
大臂的最大附加负载	0 kg
小臂的额定附加负载	0 kg
小臂的最大附加负载	1 kg
最大总负载	3 kg
负载重心额定距离	
Lxy	60 mm
Lz	80 mm

地基负载

纵向动力 $F(v)$	
$F(v)$ 正常)	-
$F(v_{max})$	-
横向动力 $F(h)$	
$F(h)$ 正常)	-
$F(h_{max})$	-
倾覆力矩 $M(k)$	
$M(k)$ 正常)	-
$M(k_{max})$	-
轴 2 转矩 $M(r)$	
$M(r)$ 正常)	-
$M(r_{max})$	-

垂直力 $F(v)$ 、水平力 $F(h)$ 、倾斜力矩 $M(k)$ 、轴 1 的转矩 $M(r)$

Process forces

Process forces are forces that are exerted on the robot in a defined manner by an external influence. Causes include pressing processes and machining tasks carried out by the robot. The process forces that the robot can withstand depend to a very great degree on the robot position, payload, direction and duration of action. For this reason, it is not possible for a simple limit value to be specified for permissible process forces.

Permissible process torques are therefore specified for all axes of the robot. These values indicate the torque that each robot axis can withstand on a sustained basis as a result of external forces.

The following load torques must not be exceeded:

A1	87 Nm
A2	65 Nm
A3	35 Nm
A4	6 Nm
A5	6 Nm
A6	3 Nm

Flange loads

Flange loads


Due to the motion of the payload (e.g. tool) mounted on the robot, forces and torques act on the mounting flange. These forces and torques depend on the motion profile as well as the mass, load center of gravity and mass moment of inertia of the payload.

The specified values refer to nominal payloads at the nominal distance and do not include safety factors. It is imperative for the load data to be entered in the robot controller. The robot controller takes the payload into consideration during path planning. A reduced payload does not necessarily result in lower forces and torques.

The values are guide values determined by means of trial and simulation and refer to the most heavily loaded machine in the robot family. The actual forces and torques may differ due to internal and external influences on the mounting flange or a different point of application. It is therefore advisable to determine the exact forces and torques where necessary on site under the real conditions of the actual robot application.

The operating values may occur permanently in the normal motion profile. It is advisable to rate the tool for its fatigue strength.

The EMERGENCY STOP values may arise in the event of an Emergency Stop situation of the robot. As these should only occur very rarely during the service life of the robot, a static strength verification is usually sufficient.

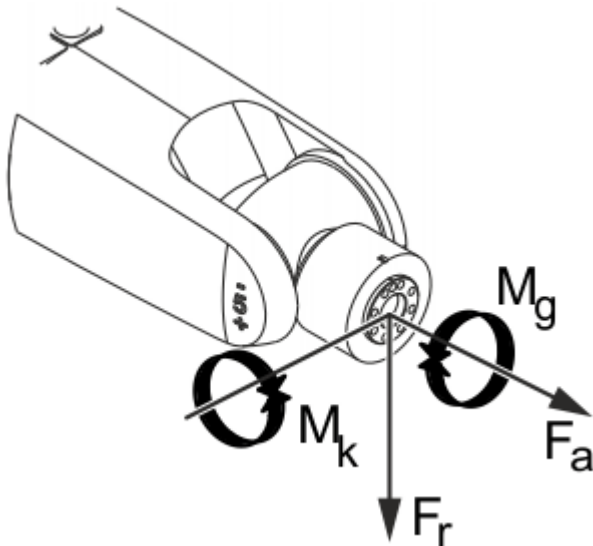

Flange loads

Flange loads during operation	
F(a)	194 N
F(r)	144 N

M(k)	21 Nm
M(g)	9 Nm
Flange loads in the case of EMERGENCY STOP	
F(a)	244 N
F(r)	263 N
M(k)	35 Nm
M(g)	19 Nm


Axial force $F(a)$, radial force $F(r)$, tilting torque $M(k)$, torque about mounting flange $M(g)$

精度数据

i 仅适用于带定位精确的机器人选项（用于地面或天花板安装）的机器人在地面位置测量的机器人只允许在地面位置运行。这同样适用于天花板位置的机器人。

位置精度

位置绝对精度 (ISO 9283)	$\pm 0.3 \text{ mm}$
位姿重复精度 (ISO 9283)	$\pm 0.02 \text{ mm}$

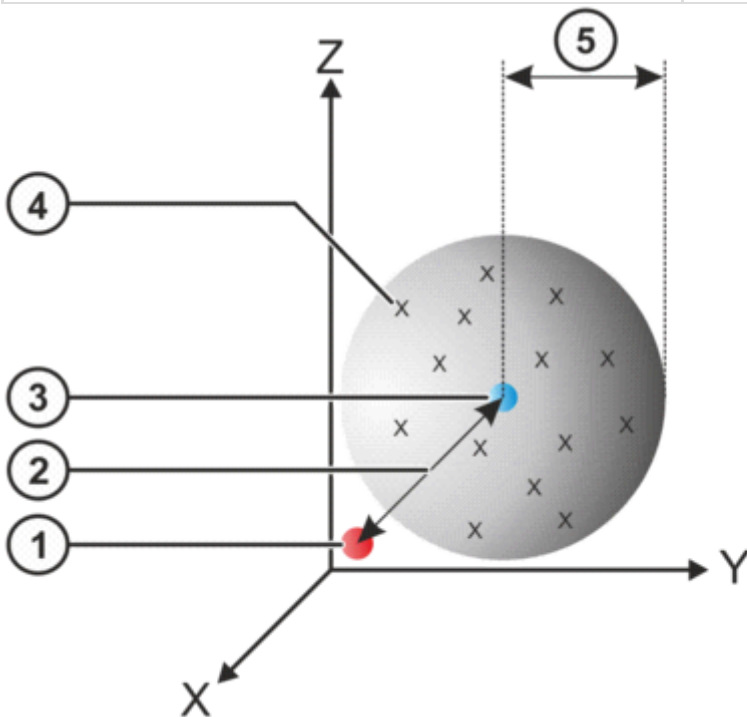

位置精度

1	编程设定的位置	4	测得的位置
2	位置绝对精度	5	位置重复精度
3	测得位置的平均值		

- 位置精度表示编程的机器人位置和实际占用的机器人位置之间的偏差，并用坐标测量机（CMM）在 9 个位置测量。
- 重复精度由重复 30 次测量时实际占用的机器人位置的偏差得出。
- 对于定位精确的机器人，这些值针对的是机器人基座。

轨迹精度

线性运动的轨迹精度:


LIN 轨迹绝对精度 (ISO 9283)	$\pm 0.3 \text{ mm}$
SLIN 轨迹绝对精度 (ISO 9283)	$\pm 0.3 \text{ mm}$
轨迹重复精度 线性 (ISO 9283)	$\pm 0.1 \text{ mm}$

该数据针对的是 0.5 m/s 的参考速度。

圆周运动的轨迹精度:

CIRC 轨迹绝对精度 (ISO 9283)	$\pm 0.3 \text{ mm}$
SCIRC 轨迹绝对精度 (ISO 9283)	$\pm 0.3 \text{ mm}$
圆周轨道重复精度 (ISO 9283)	$\pm 0.15 \text{ mm}$

该数据针对的是 0.25 m/s 的参考速度。

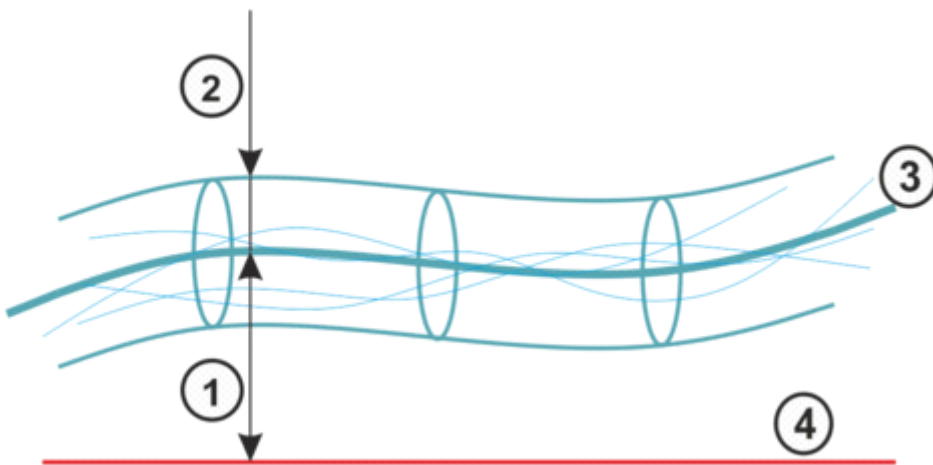


轨迹精度

1	轨迹绝对精度	3	运行轨迹的平均值
2	轨迹重复精度	4	编程的轨迹

- 轨迹精度表示机器人在编程的轨迹上运动的能力。
- 轨迹重复精度表示 10 个运行轨迹与运行轨迹平均值的偏差。

超调状态

振幅	2 mm
定位时间	0.3 s

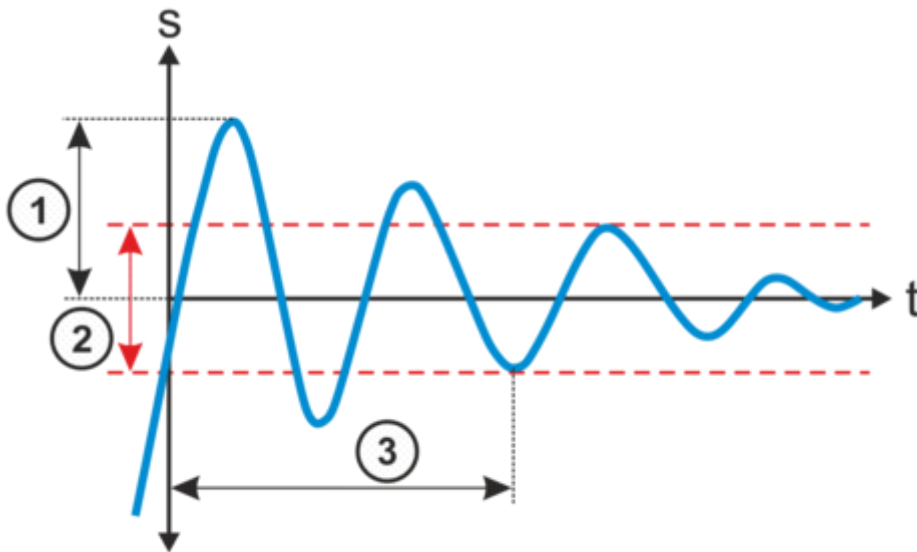

超调状态

1	超调振幅	3	定位时间
2	公差范围		

- 超调振幅影响机器人在特定位置执行受控的精确暂停的能力。
- 定位时间表示机器人在特定位置上停止的速度。

更多的信息

- 给出的数据基于 ISO 9283，并使用 Krypton/Metris 的基于摄像机的系统测得。因此重复精度被定义为 3 sigma 值。
- 所有数值均以额定负载测得。

关税信息

统计货号	84795000
原产地	DE
制造商	-
重量	26.5 kg

-
- > **KR 3 R540** 需要 (7)
 - > **KR 3 R540** 被需要, 用于 (2)
 - > **KR 3 R540** 带有如下的备件 (12)
 - > **KR 3 R540** 有以下选项 (13)